


Conceptual Drawing -
Not For Construction

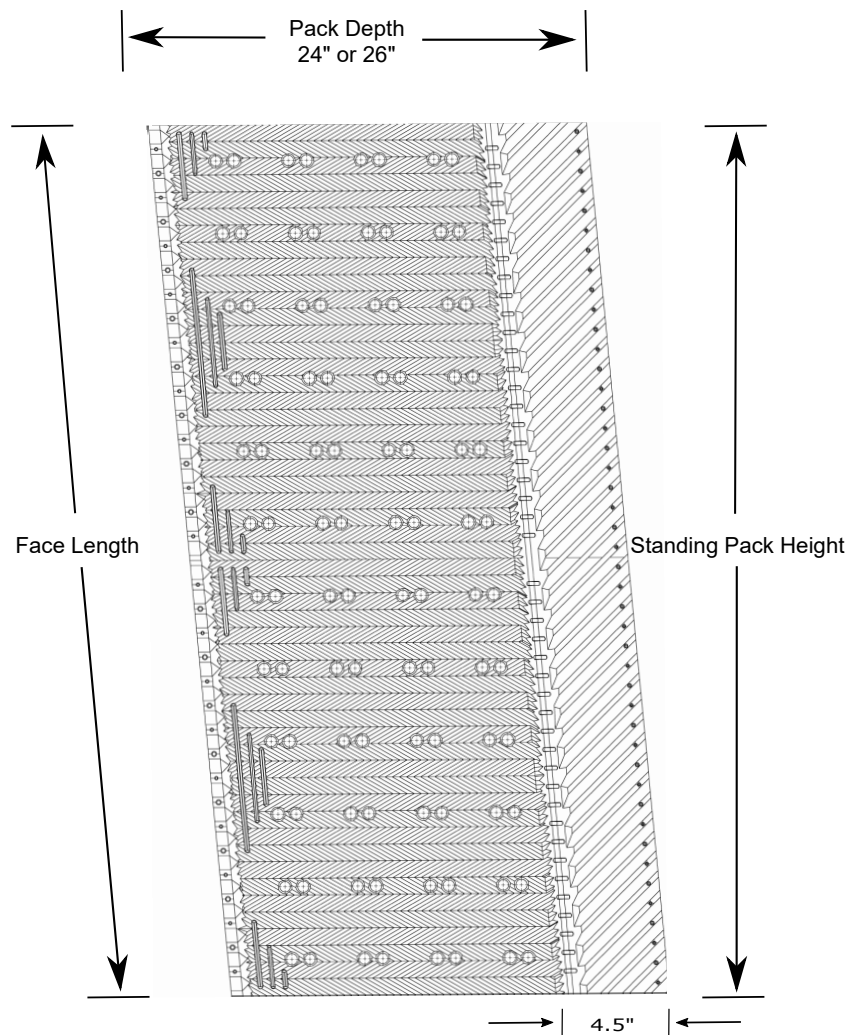

XF 75 ID Side View

NOTES:

1. Product shown is XF75 pack with integral drift eliminators.
2. All packs available in 15 mil PVC only.
3. All packs supplied in 12" widths only.
4. For "double stack" installations, suitable intermediate support to be provided between packs.
5. Min 3" wide bottom bearing support to be provided at inboard and outboard edges along the full length of the cooling tower cell.

Available Angles - 5,7.5,10 degrees

Face Length	Standing Vertical Height (in)		
	5 °	7.5°	10°
24"	23.909	23.795	23.635
48"	47.817	47.589	47.271
72"	71.726	71.384	70.906
96"	95.635	95.179	95.542
120"	119.543	118.973	118.177
144"	143.452	142.768	141.842

LET	DATE	BY	REV
DIMENSIONS IN INCHES UNLESS NOTED			
TOLERANCES UNLESS NOTED:			
FRACTIONAL + OR -	DWN BY RH	DATE 11/04/16	REV LET NTS
DECIMAL .XX + OR - .XXX .XXXX	DATA EMBODIED PROPRIETARY INFORMATION WHICH IS CONFIDENTIAL PROPERTY SHL		
ANGULAR +/-	XF 75 ID (with integral de)		
FILE FILE	TITLE		
MATERIAL			A NO.